



Fig. 1

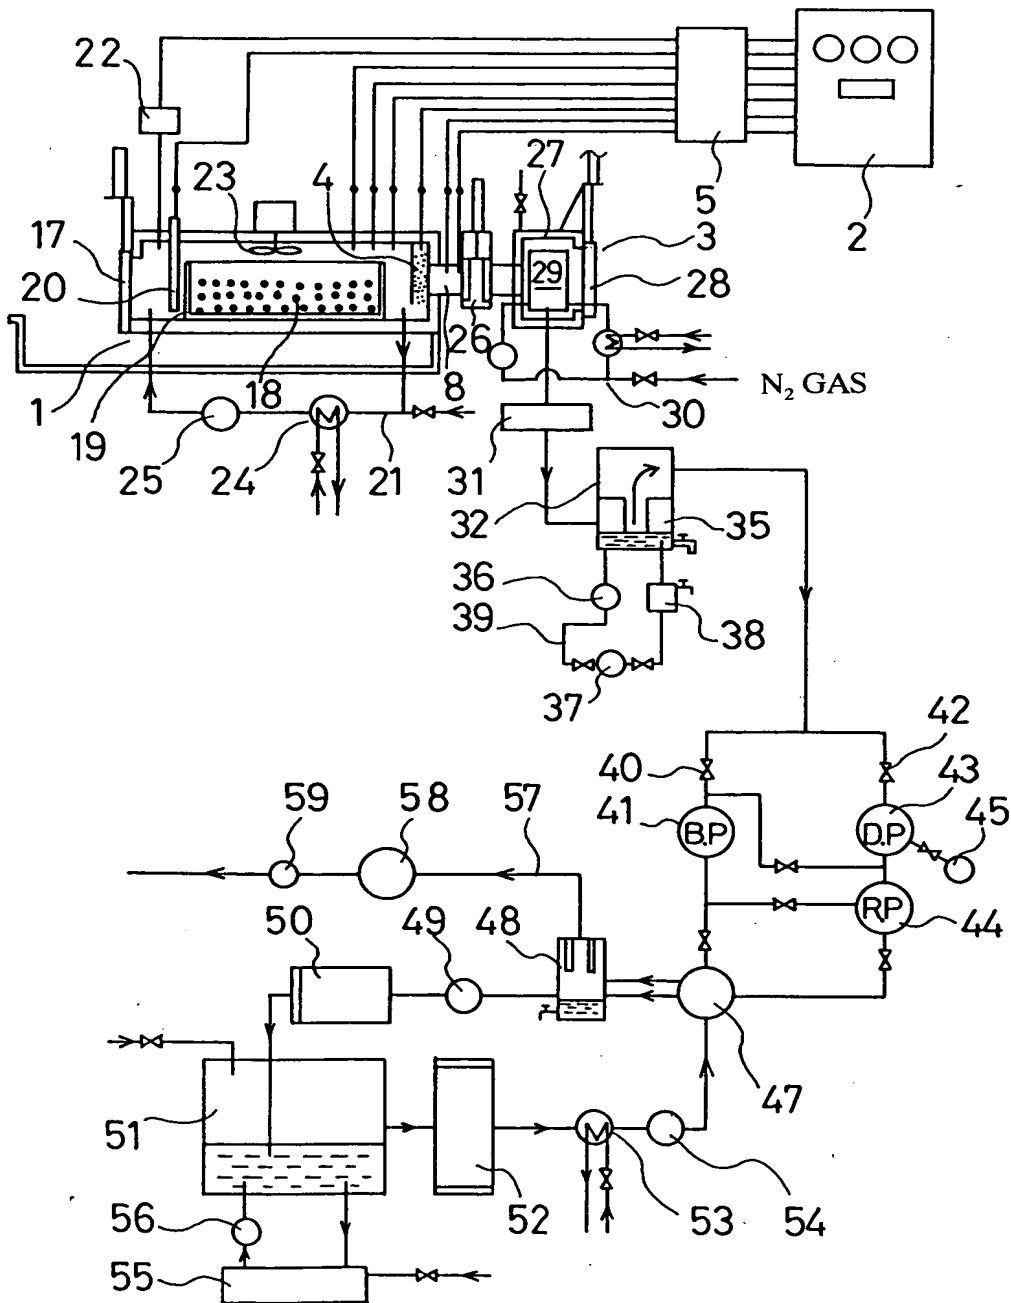

006260" 29E92960

Fig. 2

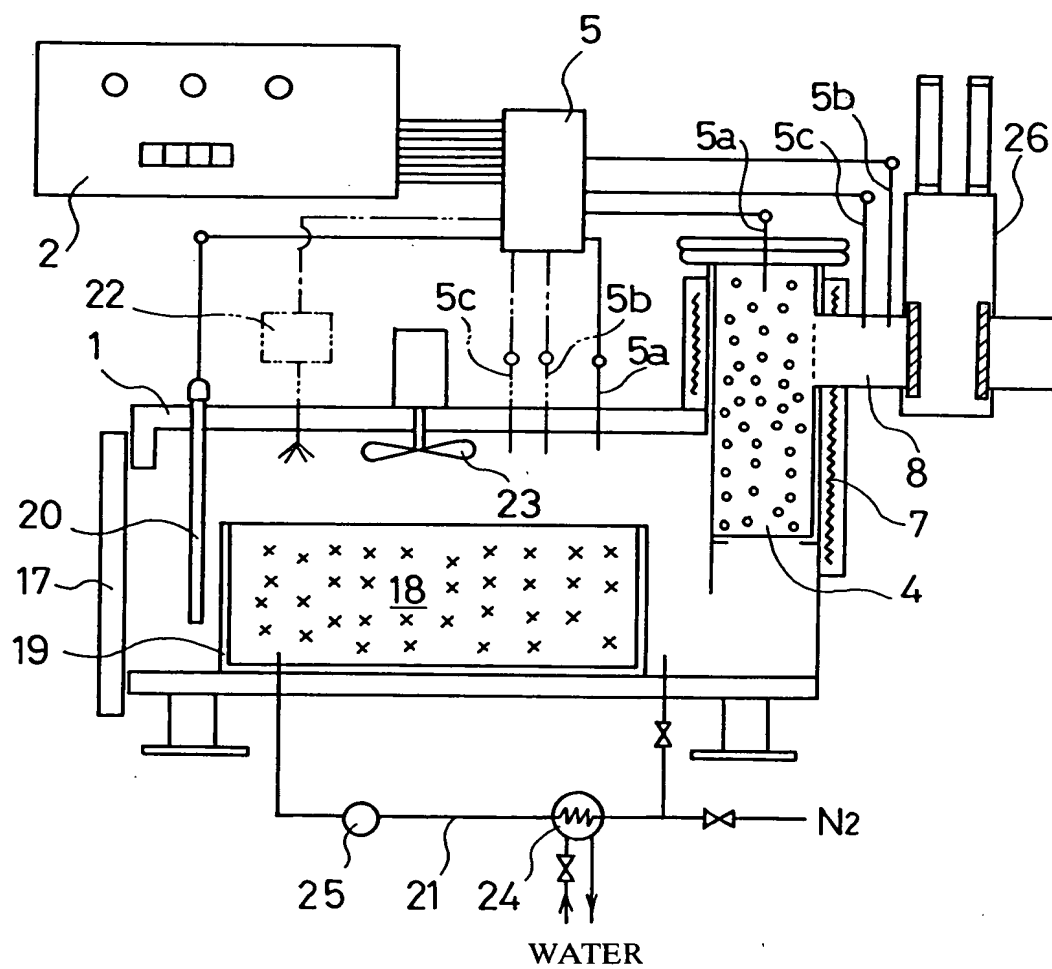


006260 29292960

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		


4/18

Fig. 4

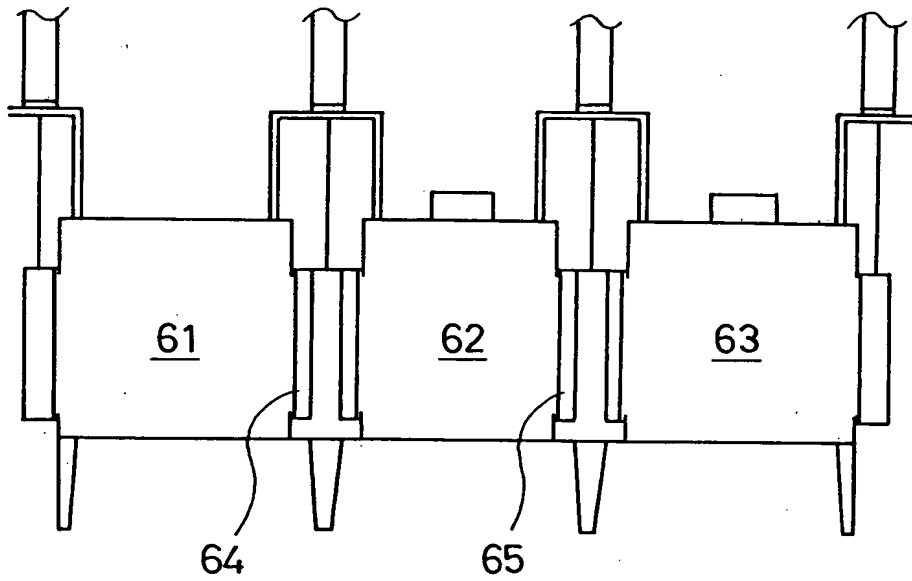

006260" 29292960

Fig. 6

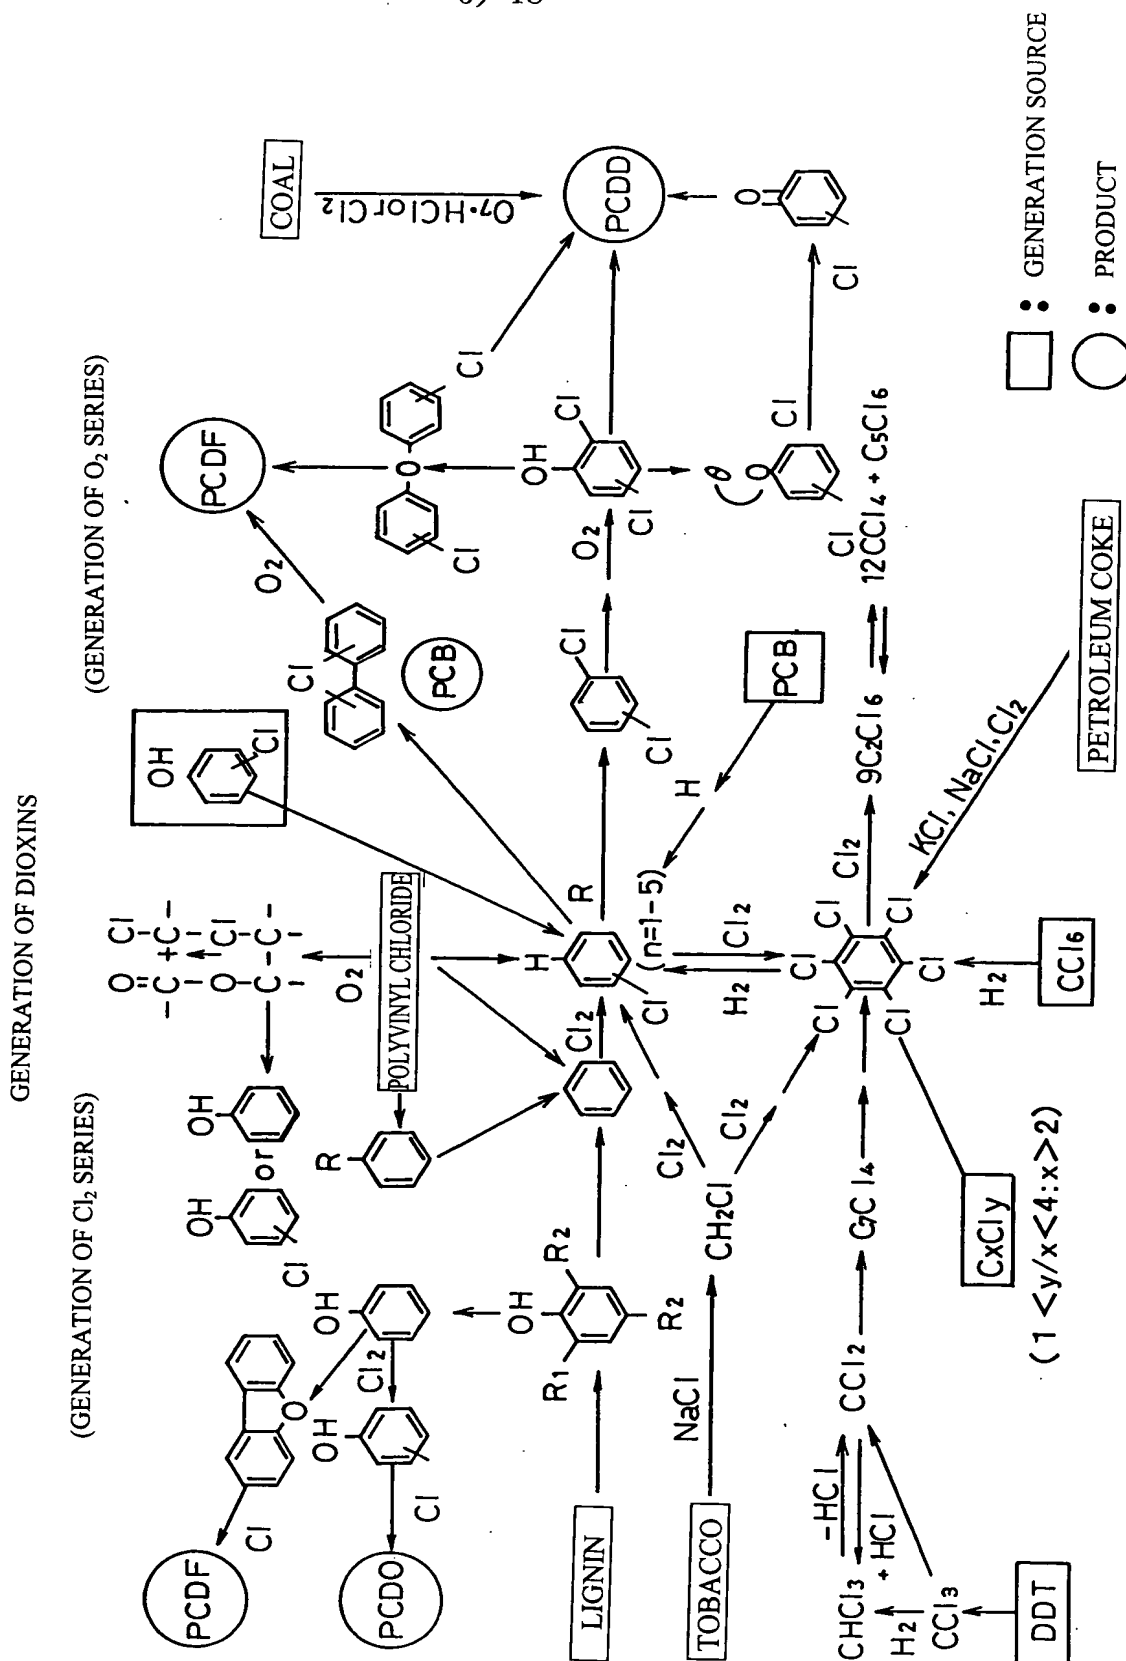

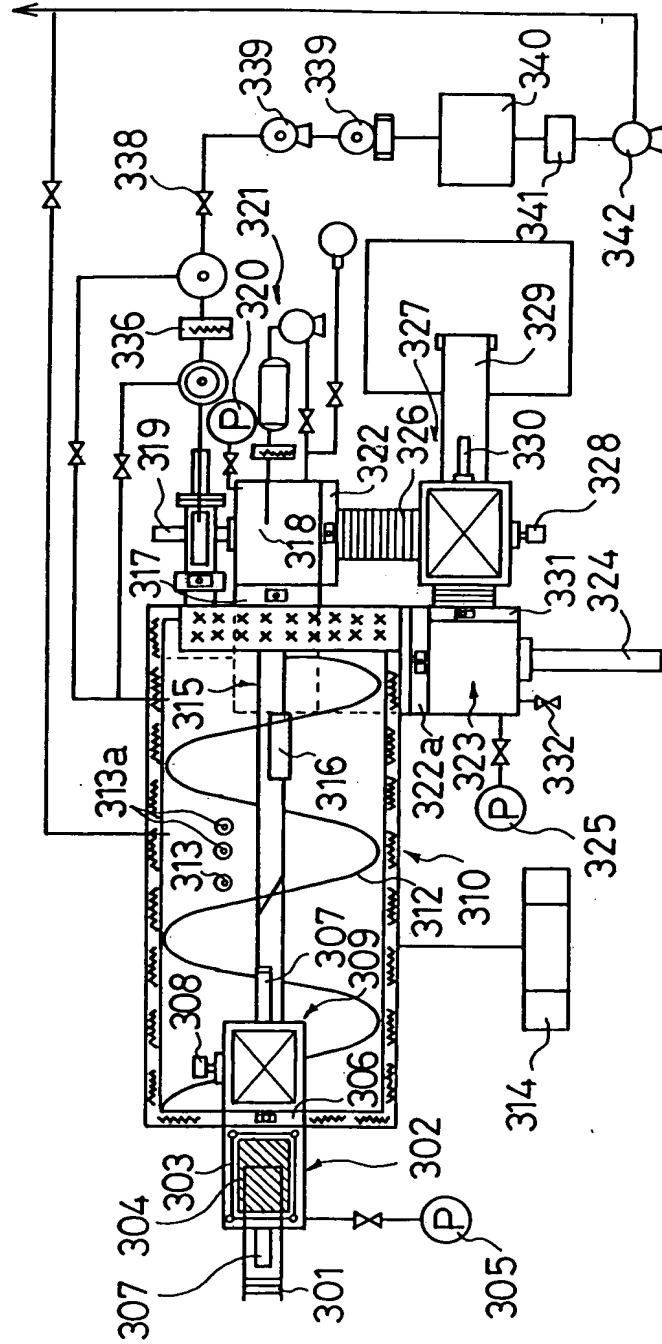


Fig. 9

000000" 29292960

00000" 29292960

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

11/18

Fig. 11

	600°C	800°C
HEATING TIME AND RETENTION TIME		
PRESSURE (REDUCED PRESSURE)	$0.01 \sim 0.05$ Torr	$0.13 \sim 0.15$ Torr
PRESSURE (NORMAL PRESSURE)	760Torr (AIR COOLING)	760Torr (AIR COOLING)

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

12/18

Fig. 12

	600°C THERMAL DECOMPOSITION	600°C THERMAL DECOMPOSITION	800°C THERMAL DECOMPOSITION*	800°C THERMAL DECOMPOSITION	800°C THERMAL DECOMPOSITION B*
	NORMAL PRESSURE	REDUCED PRESSURE	NORMAL PRESSURE	REDUCED PRESSURE	REDUCED PRESSURE
PCDFs	0.05822	n.d.	4.75	n.d.	n.d.
PCDDs	0.62615	0.00021	19.36	n.d.	n.d.
PCDFs+PCDDs	0.68437	0.00021	24.11	n.d.	n.d.

UNIT:[ng/g]

000000 29294560

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

15/18

Fig. 15


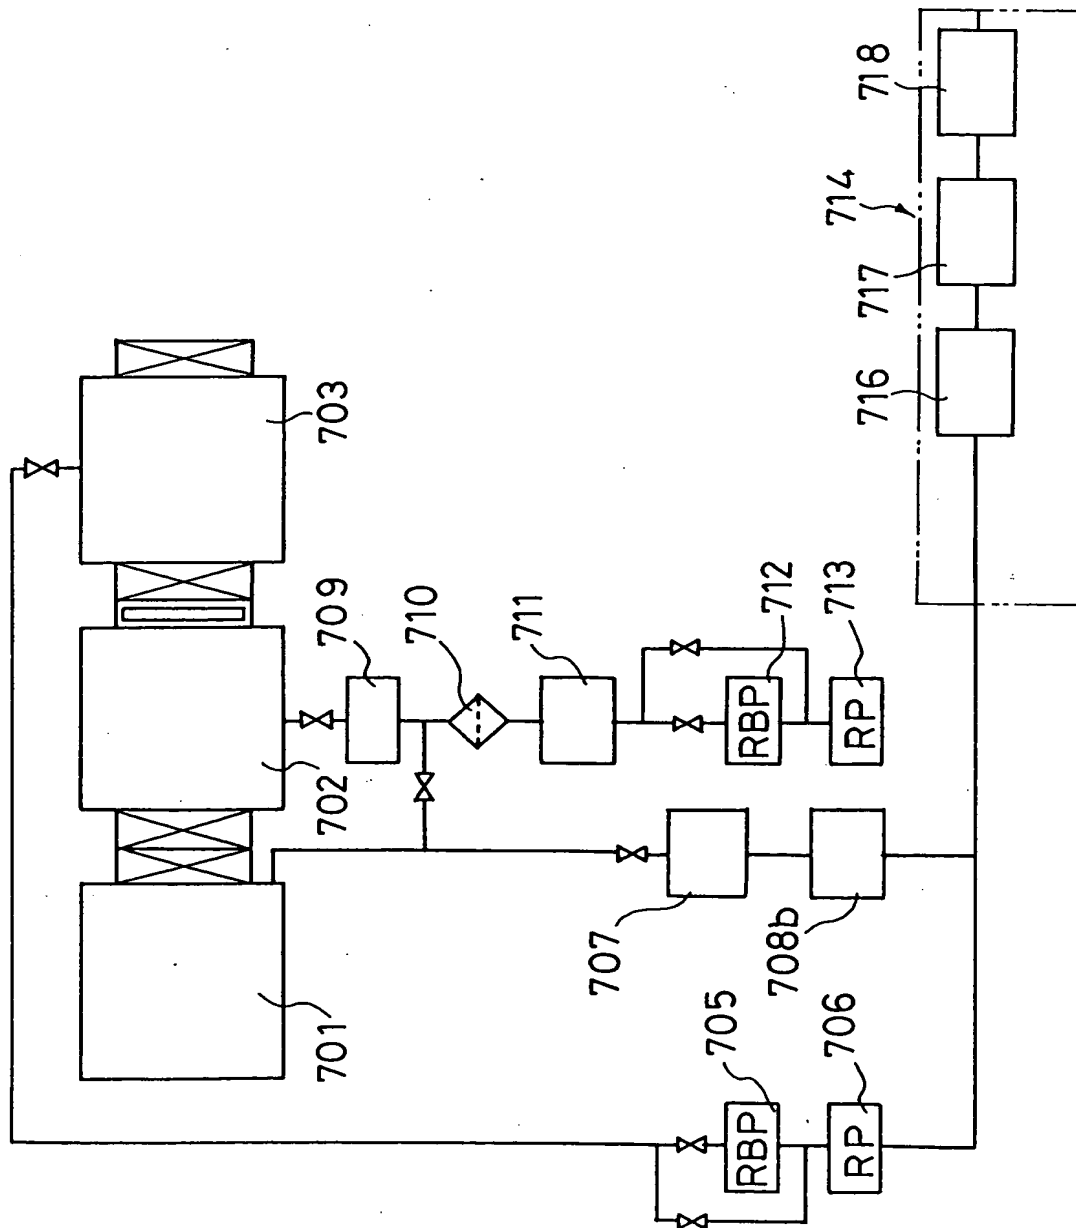


Fig. 16

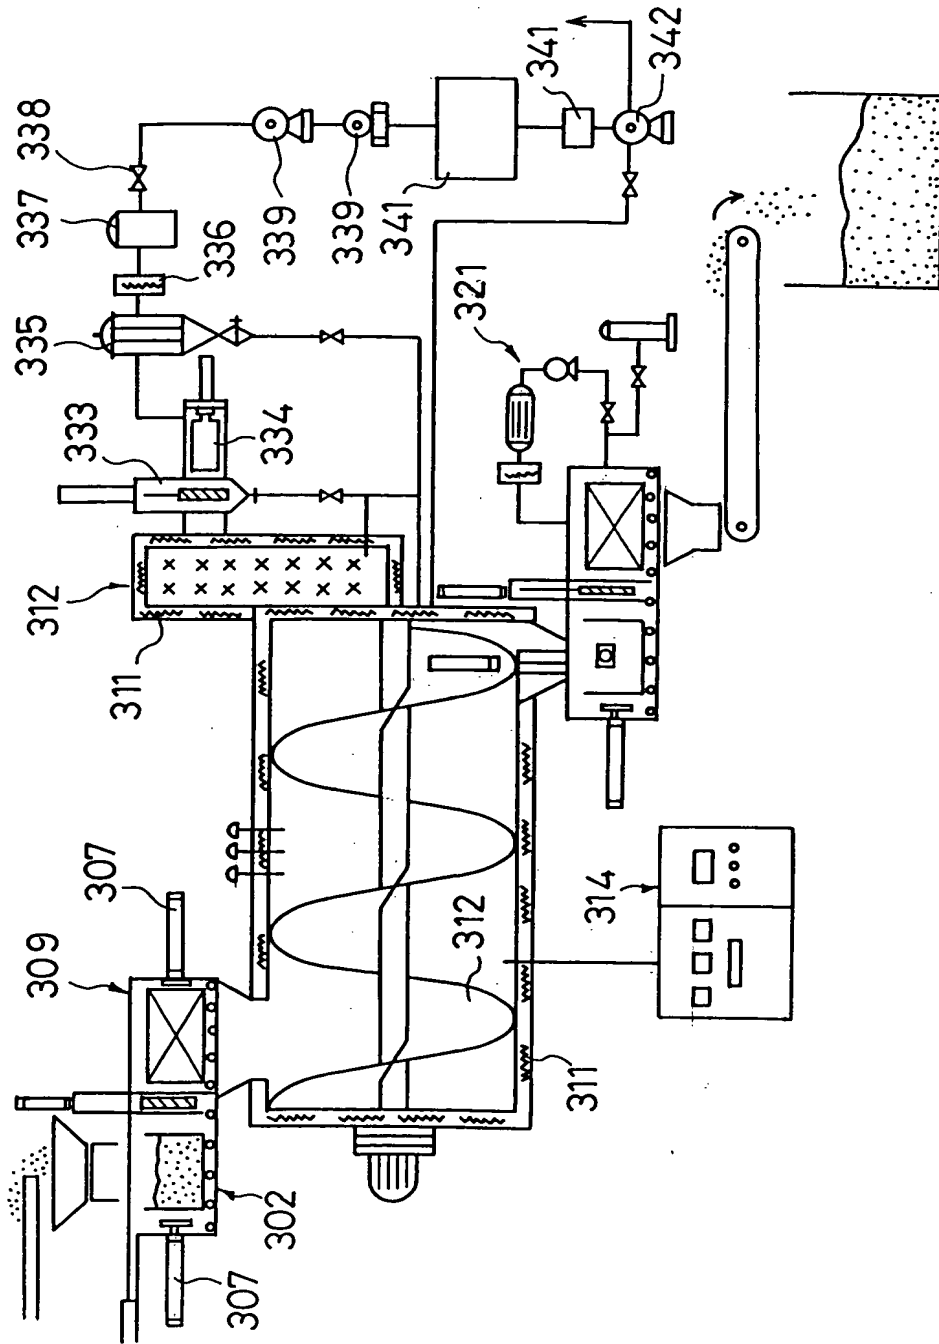


006260" 29292960

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

17/18

Fig. 17

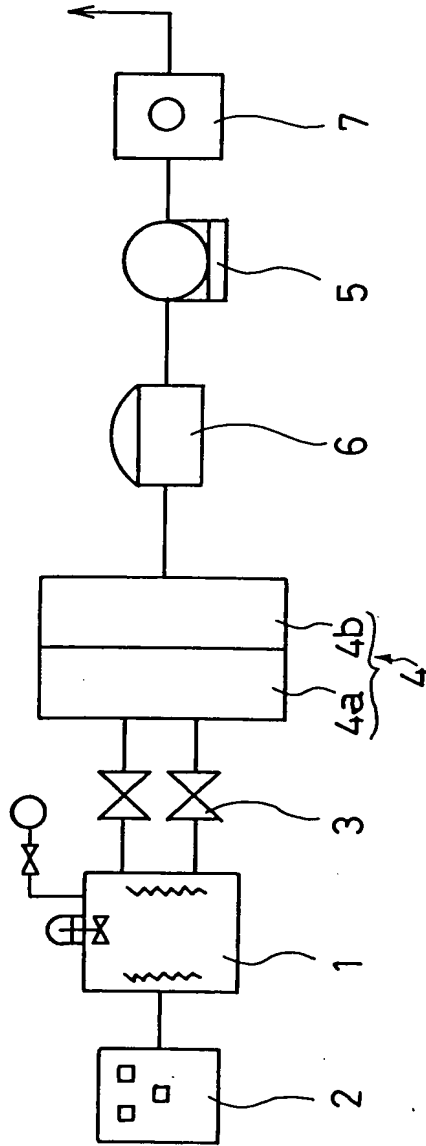

00000" 29292900

Fig. 18

